
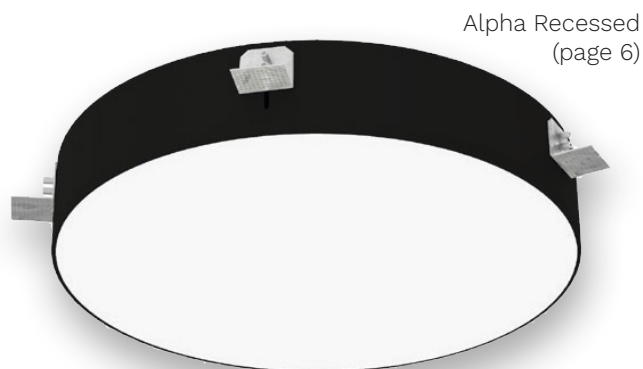
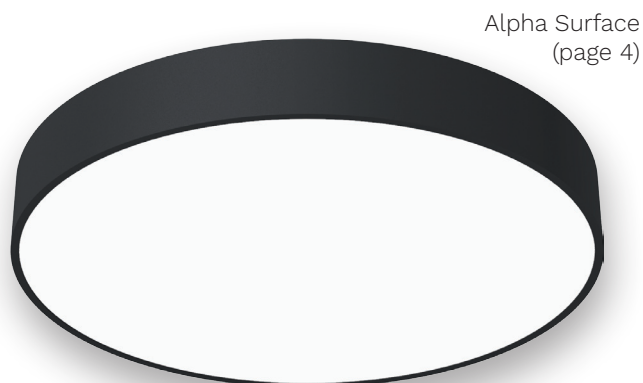


### Smart, sleek circular fixtures

A family of circular fixtures with minimalist styling and even illumination characteristics. Benefiting from custom LED boards, the Alpha range is available with suspended, surface and recessed mounting options.

- Outputs up to 29080 lm
- Efficiency up to 180.3 lm/W
- Built-in and external driver options
- DALI and non-dim control options
- Choice of acrylic satin or micro prismatic diffusers
- Aluminium profile and sheet steel housings
- Choice of colour finishes: Black, white, grey or other RAL colours on request
- Fully CE compliant
- 3-hour battery-backed emergency lighting options available on all models. Options include: Battery backup; battery backup with self test indicator or battery backup with DALI integration to allow remote monitoring and testing.

Please see page 7 for order options.

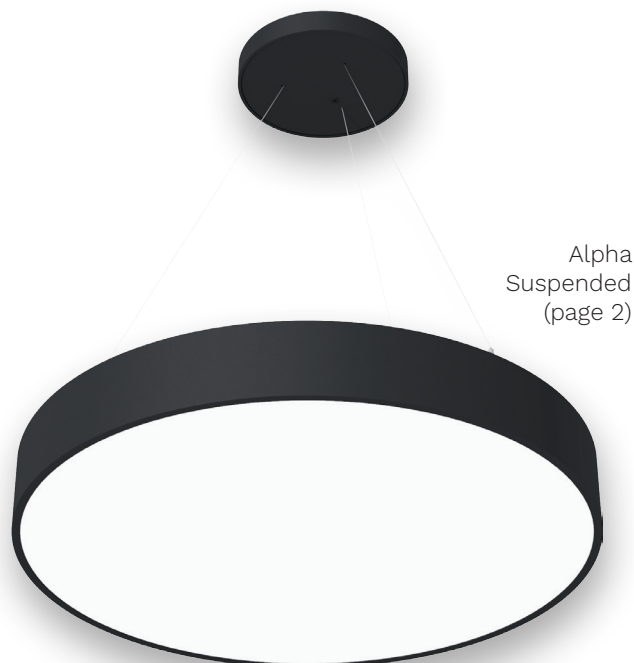


### Alpha Suspended

This model offers a suspended circular head in four different diameters with a matching circular ceiling rose. The fixture is available with either non-dim or DALI drivers, which reside within the rose. The suspension wires can be adjusted to provide precisely the required drop.


#### Specifications

Fixture diameter (mm)	Input power (W)	Luminous flux (lm)	Efficacy (lm/W)
355	20	3006	150.3
400	20	2975	148.8
400	27	3762	139.3
590	40	5943	148.6
590	55	7833	142.4
960	128	18843	147.2



<b>Colour temps.</b>	3000K or 4000K
<b>CRI (Ra)</b>	80
<b>SDCM</b>	3-step MacAdam ellipse
<b>UGR</b>	<19
<b>Lifetime</b>	56,000 hours (L <sub>70</sub> )
<b>IP rating</b>	IP20
<b>Driver options</b>	Non-dim or DALI
<b>Emergency opts.</b>	3-hour battery-back up; available with or without self test indicator or DALI integration
<b>Warranty</b>	5 years
<b>Body finish</b>	White, black or aluminium (other RAL colours on request)

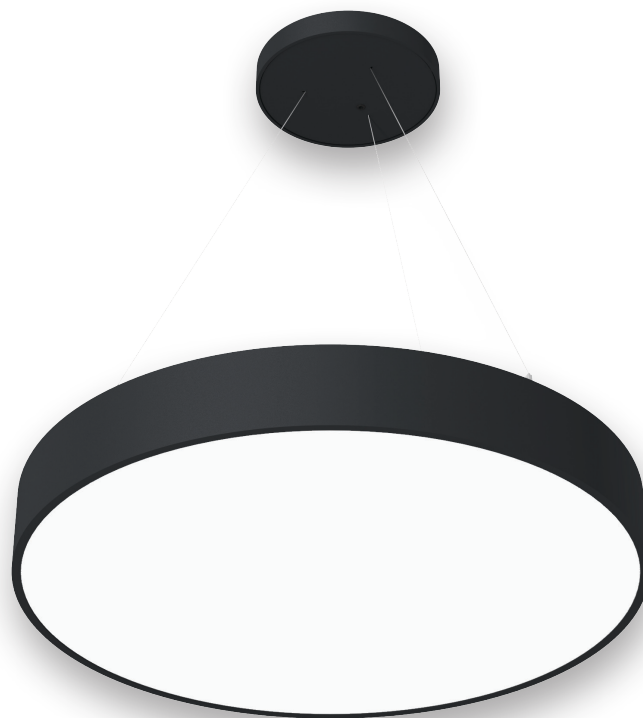

#### Dimensions

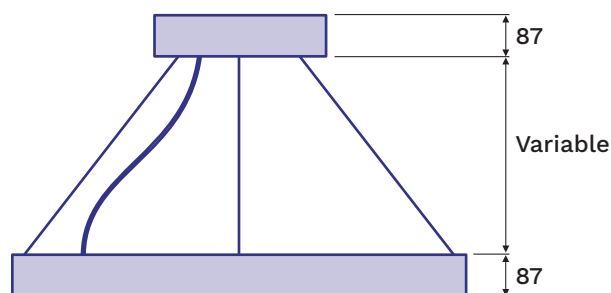

#### Polar chart (590mm, 40W, 4000K, DALI variant)

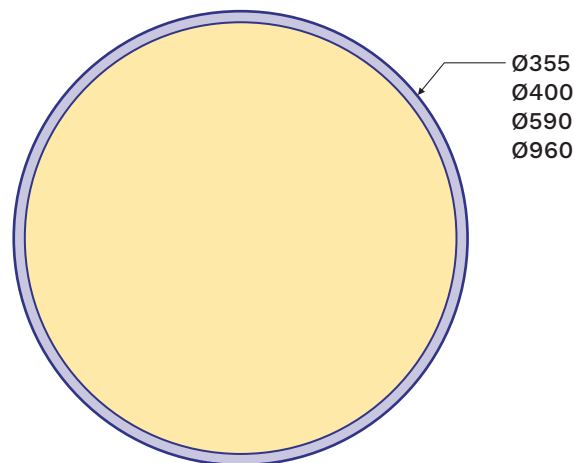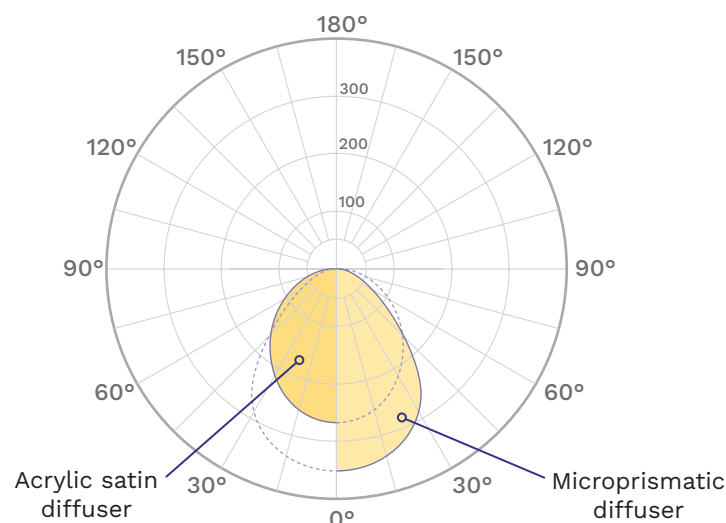

### Alpha Slim Suspended

This model offers a suspended slimline circular head in four different diameters with a matching circular ceiling rose. The fixture is available with either non-dim or DALI drivers, which reside within the rose. The suspension wires can be adjusted to provide precisely the required drop.


#### Specifications

Fixture diameter (mm)	Input power (W)	Luminous flux (lm)	Efficacy (lm/W)
355	34	4260	125.3
560	30	5280	176.0
560	48	7960	165.8
840	59	10640	180.3
840	99	16600	167.7
1120	108	19200	177.8
1120	173	29080	168.1



<b>Colour temps.</b>	3000K or 4000K
<b>CRI (Ra)</b>	80
<b>SDCM</b>	3-step MacAdam ellipse
<b>UGR</b>	<19
<b>Lifetime</b>	56,000 hours (L <sub>70</sub> )
<b>IP rating</b>	IP20
<b>Driver options</b>	Non-dim or DALI
<b>Emergency opts.</b>	3-hour battery-back up; available with or without self test indicator or DALI integration
<b>Warranty</b>	5 years
<b>Body finish</b>	White, black or aluminium (other RAL colours on request)



#### Dimensions

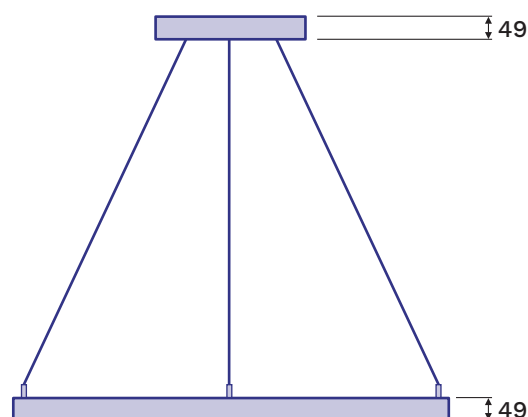

#### Polar chart (560mm, 48W, 4000K, DALI variant)

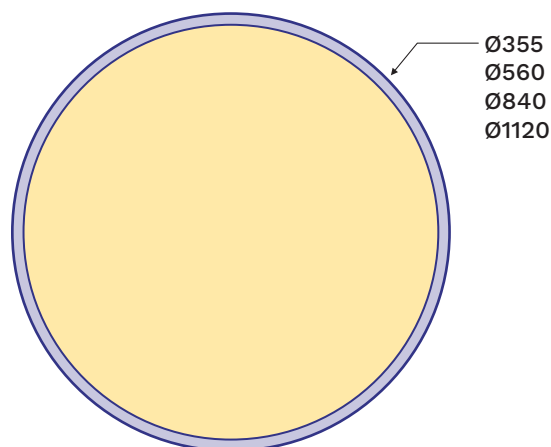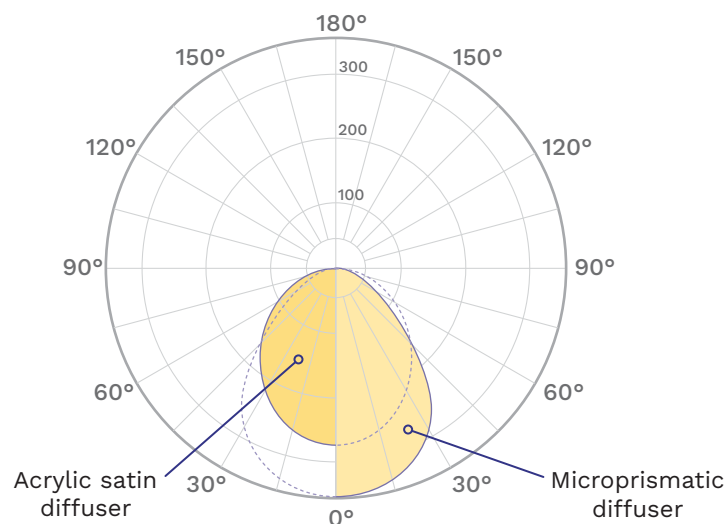

## Alpha Surface

This surface mounted model is available in four different diameters with a choice of emitter packages and diffusers. The fixture is available with either non-dim or DALI drivers.


### Specifications

Fixture diameter (mm)	Input power (W)	Luminous flux (lm)	Efficacy (lm/W)
355	20	3006	150.3
400	20	2975	148.8
400	27	3762	139.3
590	40	5943	148.6
590	55	7833	142.4
960	128	18843	147.2


<b>Colour temps.</b>	3000K or 4000K
<b>CRI (Ra)</b>	80
<b>SDCM</b>	3-step MacAdam ellipse
<b>UGR</b>	<19
<b>Lifetime</b>	56,000 hours (L <sub>70</sub> )
<b>IP rating</b>	IP20
<b>Driver options</b>	Non-dim or DALI
<b>Emergency opts.</b>	3-hour battery-back up; available with or without self test indicator or DALI integration
<b>Warranty</b>	5 years
<b>Body finish</b>	White, black or aluminium (other RAL colours on request)



### Dimensions

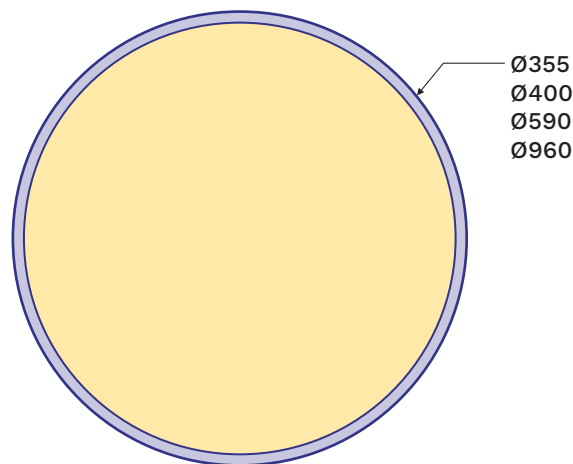

### Polar chart (590mm, 40W, 4000K, DALI variant)

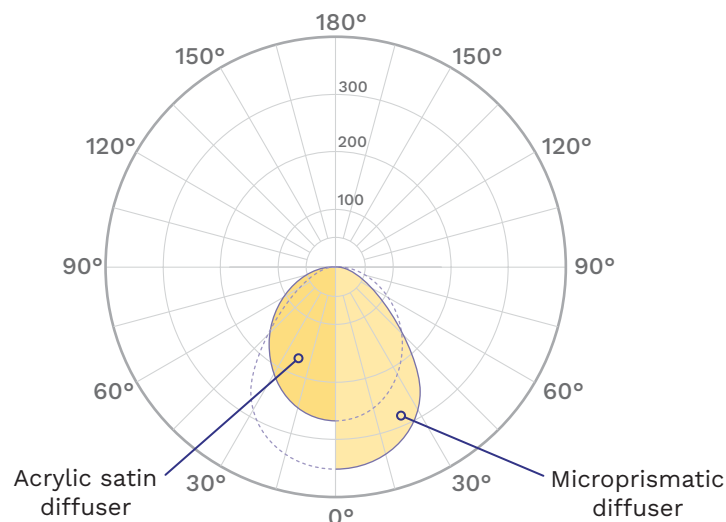

## Alpha Slim Surface

This model offers a surface mounted circular head in four different diameters. The fixture is available with either non-dim or DALI external drivers.


### Specifications

Fixture diameter (mm)	Input power (W)	Luminous flux (lm)	Efficacy (lm/W)
355	34	4260	125.3
560	30	5280	176.0
560	48	7960	165.8
840	59	10640	180.3
840	99	16600	167.7
1120	108	19200	177.8
1120	173	29080	168.1


<b>Colour temps.</b>	3000K or 4000K
<b>CRI (Ra)</b>	80
<b>SDCM</b>	3-step MacAdam ellipse
<b>UGR</b>	<19
<b>Lifetime</b>	56,000 hours (L <sub>70</sub> )
<b>IP rating</b>	IP20
<b>Driver options</b>	Non-dim or DALI
<b>Emergency opts.</b>	3-hour battery-back up; available with or without self test indicator or DALI integration
<b>Warranty</b>	5 years
<b>Body finish</b>	White, black or aluminium (other RAL colours on request)



### Dimensions

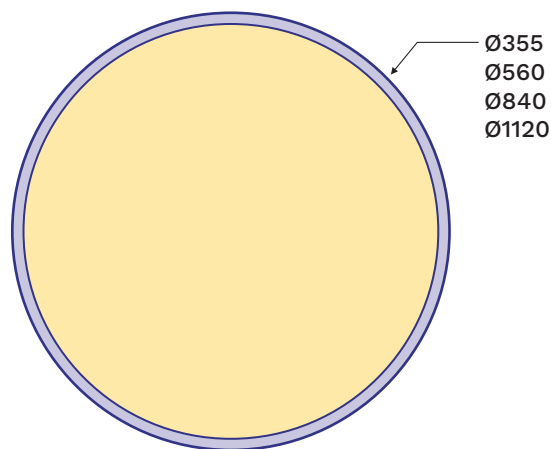

### Polar chart (560mm, 48W, 4000K, DALI variant)

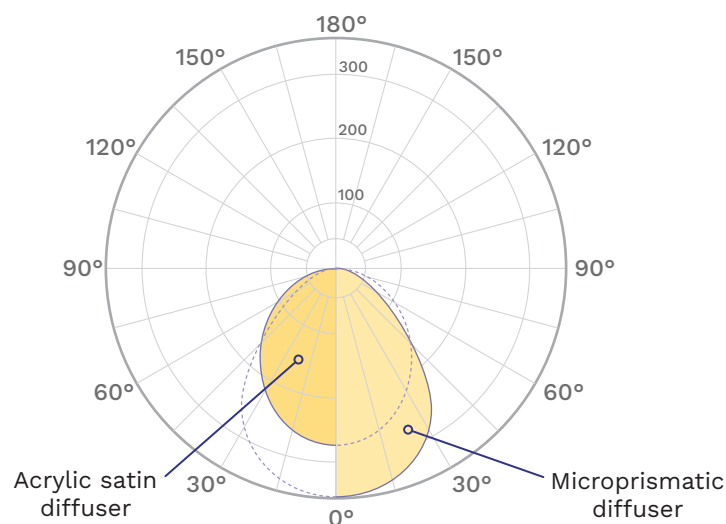

### Alpha Recessed

This recessed model is available in four different diameters with a choice of emitter packages and diffusers. The fixture is available with either non-dim or DALI drivers.


### Specifications

Fixture diameter (mm)	Input power (W)	Luminous flux (lm)	Efficacy (lm/W)
340	21	3265	155.5
440	20	2975	148.8
440	27	3762	139.3
630	40	5943	148.6
630	55	7833	142.4
1050	128	18843	147.2


<b>Colour temps.</b>	3000K or 4000K
<b>CRI (Ra)</b>	80
<b>SDCM</b>	3-step MacAdam ellipse
<b>UGR</b>	<19
<b>Lifetime</b>	56,000 hours (L <sub>70</sub> )
<b>IP rating</b>	IP20
<b>Driver options</b>	Non-dim or DALI
<b>Emergency opts.</b>	3-hour battery-back up; available with or without self test indicator or DALI integration
<b>Warranty</b>	5 years
<b>Body finish</b>	White, black or aluminium (other RAL colours on request)



### Dimensions

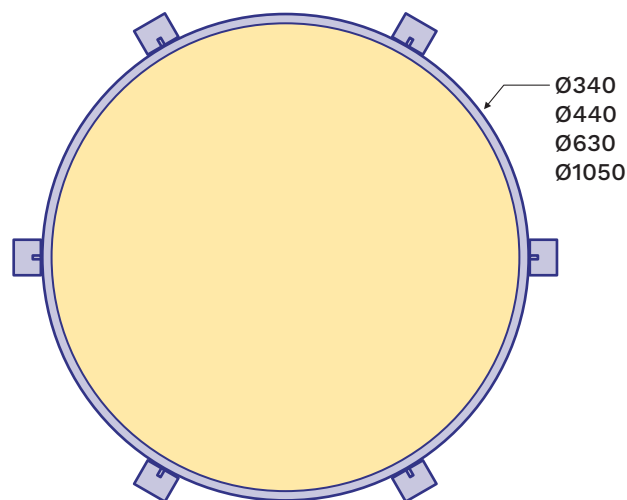

### Polar chart (630mm, 40W, 4000K, DALI variant)

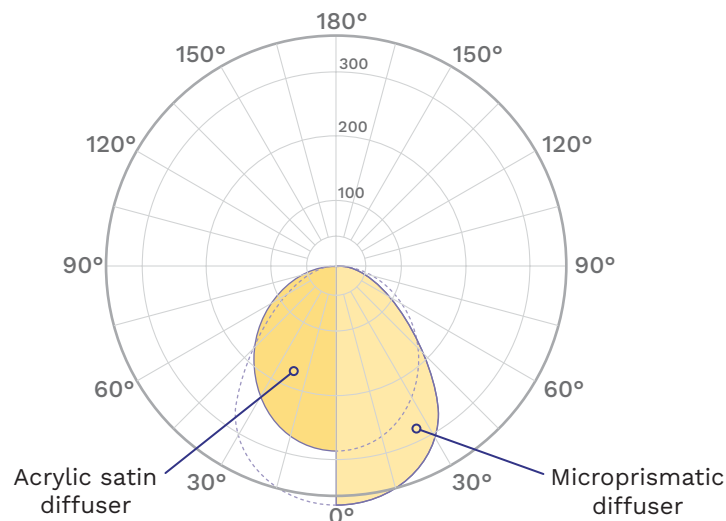

### Order options

Range	Family	Variants	Diameters	Powers	CCT/CRI	Control	Colour	Optics	Emergency
Reality	Alpha	Suspended Surface Recessed Slim Suspended Slim Surface	340 to 1120  (mm)	20 to 173  (W)	3000K or 4000K  80 CRI	DALI NonDim	Black White Grey Granite Grey	Acrylic satin diffuser or Micro prismatic diffuser	None or 3hrs battery or 3hrs battery with status indicators or 3hrs battery with DALIintegration